


Regupol met als bijzondere eigenschappen zeer slijtvast en antislip/anti-schuif.

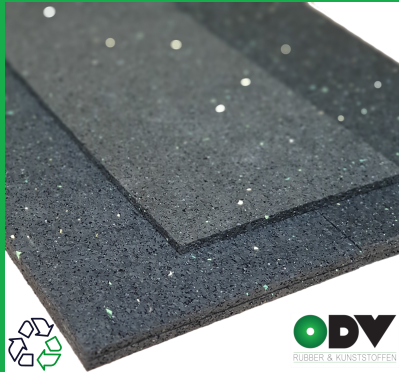

Shape	Rolls
Color	Black
Temperature Range	-40 and 120 °C
Density	860 kg/m ³
Elongation at break	60 %
Tensile strength	0,600 N/mm ²
Flame Resistance (EN 13501-1)	E

Material information

Regupol with special properties of high wear resistance and anti-slip/anti-shear. Certified material for load securing in trucks and other applications.

Usage examples

This Regupol with the quality 7210 LS is specifically designed to secure cargo. Lengthwise, this material is laid under pallets and on the floor of, for example, a delivery van or in the cargo hold of a truck. The strips can be supplied in various sizes. Safety and protection of your products during transport.

Processing

In our own three production lines, we can produce Regupol strips, cubes and sheets in any size and number, package (e.g. in a sealed in our shrink tunnel) and label (e.g. for private label products). Special applications and shapes are also possible by means of a die-cutting machine (70 tons die-cutting).

Measurement tolerance 7715-P3

UV	Wear resistance	Acids	Alkali	Base
Low	Not suitable	Low	Low	Low

Item Overview

Item Code	Item Name	Width (mm)	Length (mm)
25400040	Regupol 7210 LS+ 4 mm	1.400	100.000
25400060	Regupol 7210 LS+ 6 mm	1.250	69.200
25400080	Regupol 7210 LS+ 8 mm	1.500	51.200
25400100	Regupol 7210 LS+ 10 mm	1.300	40.750

We provide product information as known by us with great care. We cannot accept any liability for errors and/or inaccuracies and/or incompleteness. Please note that our products are intended for professional use only. For high impact applications and/or combinations of limit values we always recommend to have the properties specific to that situation verified by us. If there are multiple specifications for a product we will use the standard of 2mm or the closest specification.

